

# Self-adhesive LIMS (Liquid Silicone Rubber Injection Molding System)

## KE-2097 Series, KE-2098 Series

LIMS with adhesion to various resins and metals

<b>Primerless</b>	<b>Adhesive</b>	<b>Short time molding</b>
<b>Automated molding</b>	<b>Reduced operating cost</b>	<b>Flashless, runnerless</b>



**Features**

- Polycarbonate, polybutylene terephthalate, and metal can be adhered without primer.
- Reduction of processes and cost by eliminating the need for adhesives and post cure.

**Applications**

Composite parts of silicone rubber and resins and metals



■ **General properties**


Grade		PC adhesive, FDA compatibility			PA adhesive, metal adhesive		
Product name		KE-2097-40-A/B	KE-2097-50-A/B	KE-2097-60-A/B	KE-2098-40-A/B	KE-2098-50-A/B	KE-2098-60-A/B
Appearance		Translucent	Translucent	Translucent	Translucent	Translucent	Translucent
Viscosity 0.9s-1 Pa·s		770/870	600/620	610/580	1,040/1,150	1,100/1,210	940/975
Curing speed at 130°C MDR	T10	25	23	25	25	25	23
	T90	46	43	63	54	46	48
Standard molding condition	Primary cure	150°C x 5 min	150°C x 5 min	150°C x 5 min	120°C x 10min	120°C x 10min	120°C x 10min
	Post cure	No need	No need	No need	No need	No need	No need
Hardness Durometer A		40	50	60	40	49	59
Density at 23°C g/cm <sup>3</sup>		1.13	1.12	1.14	1.14	1.14	1.14
Tensile strength MPa		9.7	10.6	9.7	9.7	9.6	8.4
Elongation at break %		710	620	380	650	600	410
Tear strength Crescent kN/m		28	42	45	33	47	39
Rubber hardness lineup Durometer A		30 - 60			40 - 60		

(Not specified values)

# Self-adhesive LIMS

## KE-2097 Series, KE-2098 Series

### Shear adhesion strength to various adherends

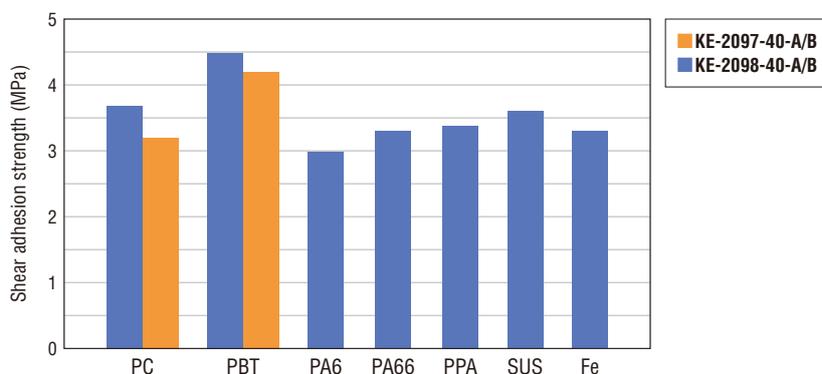

\* This value is not a specification value or guaranteed value.

## Handling precautions

1. Seal container tightly and store in a cool, dark place (25°C or below, out of direct sunlight) with good ventilation. Keep away from heat and flame because the primers used may be classified as flammable hazardous materials.
2. LIMS liquid silicone rubbers may not cure properly if they come in contact with certain substances, including amines, sulfur, organophosphorus compounds and organotin compounds. If there is a possibility of curing inhibition, the user should perform a test to determine whether the product will cure properly.

### Some curing inhibitors

- Chloroprene and other synthetic rubbers
- Amine-cure epoxies
- Sulfur compounds
- PVC insulating tape
- Soft PVC
- Soldering flux that contains rosin

3. Mixing Liquid B with alkaline substances produces flammable hydrogen gas, so handle with caution.

## Cautions in using self-adhesive liquid silicon

1. Even among the same resin materials, some materials are not suited to addition reactions of silicone rubbers or cannot sufficiently exert adhesion depending on their method of polymerization, degree of refining and types of additive and resin. When designing, check the resin to be used in advance.
2. In the situations where the resin surface is dirty, clean the surface with a solvent or similar.

3. As for polyamide resin, it is recommended to dry the resin before molding since it has high water absorption properties. Moreover, attention must be paid to the molding procedure and conditions in the situations where heat treatment and humidity conditioning are performed to acquire dimensional stability.
4. The release properties may vary depending on the mold material and condition of the surface (plating), so be sure to test prior to use.

## Safety and hygiene

1. This product causes serious eye irritation and may cause skin irritation. When handling the product, be sure to avoid contact with the skin and mucous membranes by wearing protective glasses and protective gloves. In case of skin contact, immediately wipe off with dry cloth and then flush thoroughly with running water. In case of accidental eye contact, flush immediately with plenty of clean water for at least 15 minutes and then seek medical attention. Contact lens wearers must take special care. If the products get into the eye, the contact lens may become stuck to the eye.
2. In a confined space with poor ventilation, please wear a protective mask. It is recommended to provide local ventilation. If vapors are inhaled and victims feel uncomfortable, move immediately to an area with fresh air. When you put non-hardening substance into the discard, silica and other powder generate. So you should wear a protective mask.
3. Keep out of reach of children.
4. Please read the Safety Data Sheets (SDS) before use. SDS can be obtained from our Sales Department.

•The data and information presented in this catalog may not be relied upon to represent standard values. Shin-Etsu reserves the right to change such data and information, in whole or in part, in this catalog, including product performance standards and specifications without notice.

•Users are solely responsible for making preliminary tests to determine the suitability of products for their intended use. Statements concerning possible or suggested uses made herein may not be relied upon, or be construed, as a guaranty of no patent infringement.

•For detailed information regarding safety, please refer to the Safety Data Sheet (SDS).

•The silicone products described herein have been designed, manufactured and developed solely for general industrial use only; such silicone products are not designed for, intended for use as, or suitable for, medical, surgical or other particular purposes. Users have the sole responsibility and obligation to determine the

suitability of the silicone products described herein for any application, to make preliminary tests, and to confirm the safety of such products for their use.

•Users must never use the silicone products described herein for the purpose of implantation into the human body and/or injection into humans.

•Users are solely responsible for exporting or importing the silicone products described herein, and complying with all applicable laws, regulations, and rules relating to the use of such products. Shin-Etsu recommends checking each pertinent country's laws, regulations, and rules in advance, when exporting or importing, and before using the products.

•Please contact Shin-Etsu before reproducing any part of this catalog. Copyright belongs to Shin-Etsu Chemical Co., Ltd.

# Shin-Etsu

Shin-Etsu Chemical Co., Ltd.  
Silicone Division Sales and Marketing Department III

Phone : +81-(0)3-6812-2408 Fax : +81-(0)3-6812-2415

<https://www.shinetsusilicone-global.com/>

■ Overseas sales office is here.

[www.shinetsusilicone-global.com/globalnetwork/](http://www.shinetsusilicone-global.com/globalnetwork/)

