

Oil Resistant, Chemical Resistant, Low-hardness Thermal Interface Pads

TC-FORS-2-40 Series

The TC-FORS-2-40 Series is a line of low-hardness thermal interface pads that can stand up to exposure to oils and acidic and alkaline fluids with no significant loss of thermal conductivity.

1 Features

- Oil resistance:** Products retain thermal conductivity even when used in proximity to engine oil.
- Chemical resistance:** Products retain thermal conductivity even when used in proximity to acidic and alkaline fluids.
- Long-term reliability:** Products provide long-term, consistent performance in temperatures ranging from -40°C up to 180°C.

2 Applications

For drawing heat away from electronic components used in automobiles and industrial machinery.


3 General properties

Parameter	Test Method	Grade	TC-FORS-2-40 Series	
			TC-100FORS-2-40	TC-200FORS-2-40
Color		—	Reddish brown	
Structure		—	Single layer sheet (Double-sided adhesive)	
Thickness	mm	—	1.0	2.0
Density at 23°C	g/cm ³	JIS K 6249	3.2	3.2
Hardness Asker C		JIS K 6249	40	40
Continuous Use Temp.	°C	—	-40 to 180	-40 to 180
Volume Resistivity	TΩ·m	JIS K 6249	9.9 × 10 ¹¹	9.9 × 10 ¹¹
Dielectric Breakdown Voltage In oil	kV	JIS K 6249	19	28
Dielectric Strength	kV	JIS C 2110	16	26
Thermal Conductivity	W/m·K	ISO 22007-2	1.9	1.9
Thermal Resistance 50°C/100 psi	cm ² ·K/W	ASTM D5470	2.77	3.50
Flame Retardance UL94		—	V-0 equivalent	V-0 equivalent
Low-molecular-weight Siloxane Content ΣD ₃₋₁₀	ppm	Shin-Etsu Method*	< 10	< 10


* Acetone extraction method.
Other thickness, Please talk to our sales department

(Not specified values)

4 Pressure and Thickness

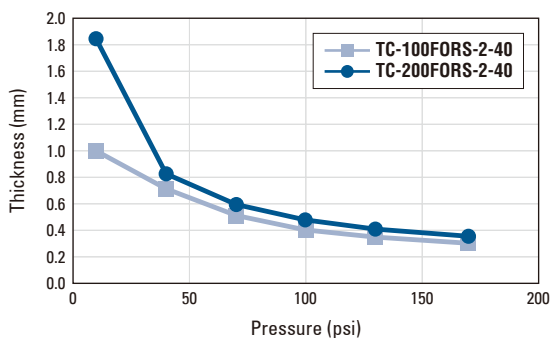

5 Pressure and Thermal Resistance

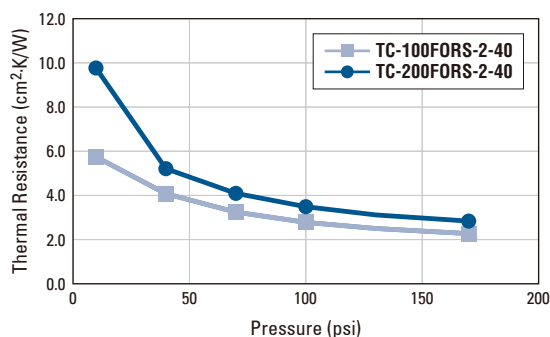

6 ATF Compatibility Test

Test Method: Physical properties were measured after immersing samples in automatic transmission fluid for a specified period at 150°C.


Sample: TC-200FORS-2-40

Test Results

Immersion Time	h	0	1000
Density at 23°C	cm ³	3.18	3.26
Hardness Asker C		38	59
Thickness	mm	2.00	2.01
Dielectric Breakdown Voltage In oil	kV	28.0	28.0
Thermal Conductivity	W/m·K	1.94	1.95

* These products are not suitable for use with all solvents.
Be sure to test to check compatibility with particular oils and fluids before use.

(Not specified values)



Appearance of typical silicone thermal conductive soft pad after 500 hrs aging in 150°C ATF

7 Handling precautions

- 1) Products should be stored in a dry place out of direct sunlight.
- 2) Avoid contact with residual solvents or oils as they may deteriorate the properties of the product.
- 3) For better results, the substrate surface should be cleaned and dried to remove any dirt, moisture or oils before application.
- 4) Prior to using the product with a thermal interface grease, test a sample with a small amount to determine compatibility.
- 5) Keep out of reach of children.
- 6) Please read the Safety Data Sheets (SDS) before use. SDS can be obtained from our Sales Department.

CAUTION

- The data and information presented in this catalog may not be relied upon to represent standard values. Shin-Etsu reserves the right to change such data and information, in whole or in part, in this catalog, including product performance standards and specifications without notice.
- Users are solely responsible for making preliminary tests to determine the suitability of products for their intended use. Statements concerning possible or suggested uses made herein may not be relied upon, or be construed, as a guaranty of no patent infringement.
- For detailed information regarding safety, please refer to the Safety Data Sheet (SDS).
- The silicone products described herein have been designed, manufactured and developed solely for general industrial use only; such silicone products are not designed for, intended for use as, or suitable for, medical, surgical or other particular purposes. Users have the sole responsibility

and obligation to determine the suitability of the silicone products described herein for any application, to make preliminary tests, and to confirm the safety of such products for their use.

- Users must never use the silicone products described herein for the purpose of implantation into the human body and/or injection into humans.
- Users are solely responsible for exporting or importing the silicone products described herein, and complying with all applicable laws, regulations, and rules relating to the use of such products. Shin-Etsu recommends checking each pertinent country's laws, regulations, and rules in advance, when exporting or importing, and before using the products.
- Please contact Shin-Etsu before reproducing any part of this catalog. Copyright belongs to Shin-Etsu Chemical Co., Ltd.

Shin-Etsu

<https://www.shinetsusilicone-global.com/>

Shin-Etsu Chemical Co., Ltd.
4-1, Marunouchi 1-chome, Chiyoda-ku,
Tokyo, 100-0005 Japan

Silicone Division, Sales and Marketing Department III
Phone : +81-(0)3-6812-2409 Fax : +81-(0)3-6812-2415