

High Transparent LIMS (Liquid Silicone Rubber Injection Molding System)

KE-2061 Series, KE-2062 Series, X-34-4368-A/B

High transparency LIMS with excellent optical transmittance

High transparency	Heat resistance	Weather resistance
Design flexible	Reduced LMW siloxane	UL94HB equivalent



Features

- **Highly transparent molding material with flexibility and heat and weather resistance.**
- **Light weight, design flexibility, and high complexity transparent materials can be molded.**

Applications

Rubber parts that require transparency, such as headlamps and LED lighting



General properties

Grade		High transparency		High transparency, high viscosity		Undercut
Product name		KE-2061-60-A/B	KE-2061-70-A/B	KE-2062-60-A/B	KE-2062-70-A/B	X-34-4368-A/B
Standard molding condition	Primary cure	120°C x 10 min	120°C x 10 min	120°C x 10 min	120°C x 10 min	120°C x 10min
	Post cure	150°C x 1 h	150°C x 1 h	150°C x 1 h	150°C x 1 h	150°C x 1h
Hardness Durometer A		59	70	59	69	71
Density at 23°C g/cm ³		1.04	1.05	1.04	1.05	1.07
Tensile strength MPa		7.3	11.0	9.0	9.6	10.0
Elongation at break %		180	98	130	120	97
Tear strength Crescent kN/m		9	10	5	6	7
Light transmittance 2 mm %		95	95	95	95	95
Refractive index 25°C		1.41	1.41	1.41	1.41	1.41
HAZE 2 mm %		2	2	2	2	2
Rubber hardness lineup Durometer A		30 - 90		30 - 90		70

(Not specified values)

High Transparent LIMS

KE-2061 Series, KE-2062 Series, X-34-4368-A/B

Compared with other highly transparent materials, they are lightweight, flexible, and heat resistant.


General properties

Parameter	Material	KE-2061-A/B	Glass	PC	Acryl
Light transmittance	%	95	91	89	93
Density at 23°C	g/cm ³	1.04	2.50	1.20	1.10
Operating temperature	°C	200	> 200	120	80
Weather resistance		○	○	×	△
Flexibility		○	×	×	×

(Not specified values)


It maintains excellent transparency even under high heat.

Light transmittance of KE-2061-60-A/B

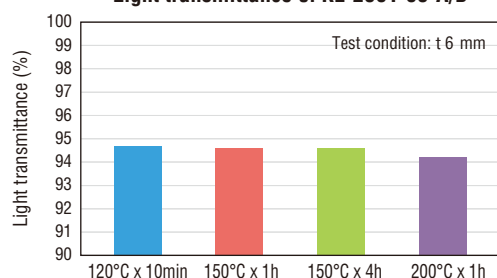

* This value is not a specification value or guaranteed value.

HAZE of KE-2061-60-A/B

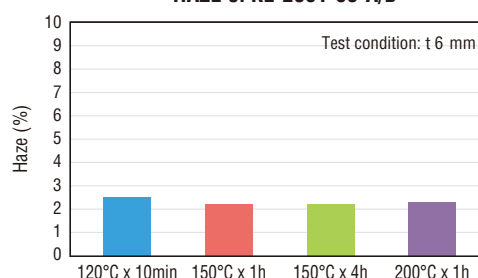

* This value is not a specification value or guaranteed value.

Handling precautions

1. Seal container tightly and store in a cool, dark place (25°C or below, out of direct sunlight) with good ventilation. Keep away from heat and flame because the primers used may be classified as flammable hazardous materials.
2. LIMS liquid silicone rubbers may not cure properly if they come in contact with certain substances, including amines, sulfur, organophosphorus compounds and organotin compounds. If there is a possibility of curing inhibition, the user should perform a test to determine whether the product will cure properly.

Some curing inhibitors

- Chloroprene and other synthetic rubbers
- Amine-cure epoxies
- Sulfur compounds
- PVC insulating tape
- Soft PVC
- Soldering flux that contains rosin

3. Mixing Liquid B with alkaline substances produces flammable hydrogen gas, so handle with caution.

Safety and hygiene

1. This product causes serious eye irritation and may cause skin irritation. When handling the product, be sure to avoid contact with the skin and mucous membranes by wearing protective glasses and protective gloves. In case of skin contact, immediately wipe off with dry cloth and then flush thoroughly with running water. In case of accidental eye contact, flush immediately with plenty of clean water for at least 15 minutes and then seek medical attention. Contact lens wearers must take special care. If the products get into the eye, the contact lens may become stuck to the eye.
2. In a confined space with poor ventilation, please wear a protective mask. It is recommended to provide local ventilation. If vapors are inhaled and victims feel uncomfortable, move immediately to an area with fresh air. When you put non-hardening substance into the discard, silica and other powder generate. So you should wear a protective mask.
3. Keep out of reach of children.
4. Please read the Safety Data Sheets (SDS) before use. SDS can be obtained from our Sales Department.

•The data and information presented in this catalog may not be relied upon to represent standard values. Shin-Etsu reserves the right to change such data and information, in whole or in part, in this catalog, including product performance standards and specifications without notice.

•Users are solely responsible for making preliminary tests to determine the suitability of products for their intended use. Statements concerning possible or suggested uses made herein may not be relied upon, or be construed, as a guaranty of no patent infringement.

•For detailed information regarding safety, please refer to the Safety Data Sheet (SDS).

•The silicone products described herein have been designed, manufactured and developed solely for general industrial use only; such silicone products are not designed for, intended for use as, or suitable for, medical, surgical or other particular purposes. Users have the sole responsibility and obligation to determine the

suitability of the silicone products described herein for any application, to make preliminary tests, and to confirm the safety of such products for their use.

•Users must never use the silicone products described herein for the purpose of implantation into the human body and/or injection into humans.

•Users are solely responsible for exporting or importing the silicone products described herein, and complying with all applicable laws, regulations, and rules relating to the use of such products. Shin-Etsu recommends checking each pertinent country's laws, regulations, and rules in advance, when exporting or importing, and before using the products.

•Please contact Shin-Etsu before reproducing any part of this catalog. Copyright belongs to Shin-Etsu Chemical Co., Ltd.

Shin-Etsu Chemical Co., Ltd.
Silicone Division Sales and Marketing Department III

Phone : +81-(0)3-6812-2408 Fax : +81-(0)3-6812-2415

<https://www.shinetsusilicone-global.com/>

■ Overseas sales office is here.

www.shinetsusilicone-global.com/globalnetwork/

